

# NVR12-16400PFAN(1U)


## 16CH 12MP PoE NDAA-Compliant Face Recognition NVR with Alarms

Provision-ISR's NVR12-16400PFAN(1U) is an NDAA-compliant high-performance network video recorder with an integrated 16-channel PoE switch for high-definition surveillance, supporting Face Recognition and advanced Video Analytics (DDA). The device, suitable for small-sized installations (up to 16 channels), features 8 alarm inputs + 4 alarm outputs and provides you with everything you need for a trouble-free CCTV project.

**16**  
CH

**CHECK POINT**  
**EMBEDDED**

**12**  
MP

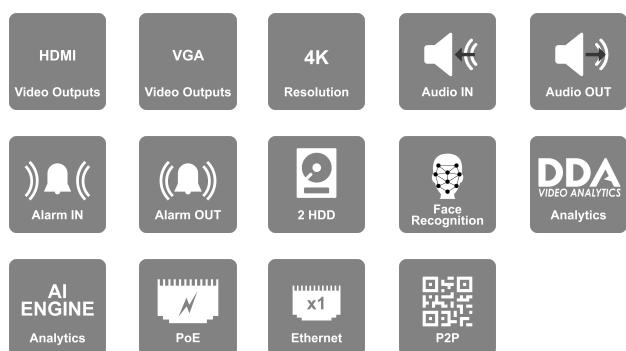

## MAIN FEATURES

- NVR12-16400PFAN(1U) Video Input:
  - 16 Channels (PoE) Video Output:
  - HDMI – 4K
  - VGA Recording:
  - 16CH 12MP Real-Time
  - FPS: 400 (PAL) / 480 (NTSC) Playback:
  - Local: 16Ch Simultaneously
  - Remote: 16Ch Simultaneously
  - Audio:
  - Input: 1CH + IPC Inputs
  - Output: 1CH + IPC Output
  - 2 Way Audio Alarm:
  - Input: 8+IPC
  - Output: 4+IPC Storage:
  - 2 x SATA (Up to 10TB each) Network:
  - 1 x RJ-45: 10/100/1000Mbps PTZ/Keyboard:
  - Network PTZ Support
  - 1 x RS-485 Keyboard Support Power Supply:
  - DC 48V/3.75A Analytics: AI by IPC:
  - All Analytics Supported by the camera AI By NVR:
  - Up to 2Ch DDA1 (Sterile Area/Line Crossing) or
  - Up to 2Ch Face Detection + Recognition or
  - Up to 6Ch Face Recognition Based on FW Version: v1.4.10
- Features subject to firmware version changes



<https://staging2.provision-isr.com>

## SPECIFICATIONS

| 3rd Party Cyber Protection            |  |
|---------------------------------------|--|
| <b>General</b>                        | Quantum IoT Nano agent by Check Point™   |
| <b>Protection Methods</b>             | Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection   |
| NDA Compliant                         |  |
| <b>NDA Compliant</b>                  | Yes  |
| Video                                 |  |
| <b>Video Input</b>                    | 16Ch over Network  |
| <b>Output</b>                         | HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)   |
| <b>View Mode</b>                      | Mirrored   |
| <b>Fish-Eye Dewarp</b>                | Local + Web  |
| <b>Decoding Format</b>                | H.265 / H.265+ / H.265S / H.264  |
| <b>Decoding Capabilities</b>          | 1Ch - 12MP ; 4Ch - 4MP ; 9-16Ch - D1   |
| Audio                                 |  |
| <b>Audio-specs-Input</b>              | 1CH RCA (Linear, 1kΩ) + IPC inputs   |
| <b>audio-specs-Output</b>             | 1CH RCA (2.0 Vp-p, 1 kΩ) + IPC outputs   |
| <b>Compression</b>                    | G.711A/G.711U  |
| <b>Two Way Audio</b>                  | Yes  |
| Analytics                             |  |
| <b>Supported Analytics</b>            | Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Object Counting (DDA), Crowd Gathering, People Intrusion, Smart Search, Face Recognition, LPR, Thermal (Limited Support). Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition. |
| <b>Analytics Channels (IPC Based)</b> | 16Ch (Requires supporting IPC)   |
| <b>Analytic Channels (NVR Based)</b>  | Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (or their combinations)  |
| <b>Face Recognition Rate</b>          | 18 Faces per second (6Ch supported)  |
| Bandwidth                             |  |
| <b>Incoming</b>                       | 160Mbps  |

# NVR12-16400PFAN(1U)

|                                   |   |
|-----------------------------------|---|
| <b>Outgoing</b>                   | 160Mbps   |
| <b>Record/ Main Stream</b>        |   |
| <b>Real-Time Recording</b>        | 16CH 12MP Real-Time   |
| <b>Record Type</b>                | Video / Video + Audio   |
| <b>Recording Modes</b>            | Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations    |
| <b>16MP</b>                       | N/A   |
| <b>12MP</b>                       | 480FPS(NTSC)/400FPS(PAL)  |
| <b>8MP</b>                        | 480FPS(NTSC)/400FPS(PAL)  |
| <b>5MP and lower</b>              | 480FPS(NTSC)/400FPS(PAL)  |
| <b>Master stream over network</b> | Up to 12CH@Recording Resolution   |
| <b>Substream</b>                  |   |
| <b>Resolution substream</b>       | Depends on IPC  |
| <b>Remote view</b>                |   |
| <b>Max Channel View</b>           | 80Ch (Limited to outgoing Bandwidth Capacity)                                   |
| <b>Remote Applications</b>        |   |
| <b>User Access</b>                | 64 Users online with Professional Authority Management                          |
| <b>Mobile App</b>                 | Provision Cam2 for iOS/Android  |
| <b>PC/Mac Software</b>            | Ossia VMS Standard / Enterprise   |
| <b>Plug-in free Web-Browser</b>   | Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) |
| <b>Plug-in based Web-Browser</b>  | Internet Explorer   |
| <b>Playback</b>                   |   |
| <b>Local</b>                      | 16Ch  |
| <b>Remote</b>                     | 16Ch  |

# NVR12-16400PFAN(1U)

|                    |   |
|--------------------|---|
| <b>Search Mode</b> | DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS |
|--------------------|---|

## Backup

|                      |  |
|----------------------|--|
| <b>USB</b>           | 2 USB 2.0 Port + 1 USB 3.0 Port                              |
| <b>Backup Format</b> | AVI (Unencrypted) / Private Format (Encrypted / Unencrypted) |

## Alarm

|                  |       |
|------------------|-------|
| <b>Alarm-in</b>  | 8+IPC |
| <b>Alarm-out</b> | 4+IPC |

## Storage

|                       |     |
|-----------------------|-----|
| <b>HDD</b>            | 2   |
| <b>E-Sata Support</b> | No  |
| <b>RAID</b>           | N/A |

## PTZ

|                           |  |
|---------------------------|--|
| <b>Connection</b>         | via Network  |
| <b>Supported Controls</b> | Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus |
| <b>RS-485</b>             | Yes (C06 Keyboard Connection)                      |

## Network

|                  |   |
|------------------|---|
| <b>Ethernet</b>  | 1000/100/10Mbps self-adaptive Ethernet interface  |
| <b>Protocols</b> | TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report (Ossia VMS) |
| <b>ONVIF</b>     | Full Device Support (Profile T/G, ONVIF Version 20.12)  |

## PoE

|                  |                                     |
|------------------|-------------------------------------|
| <b>PoE Ports</b> | 16xRJ45                             |
| <b>Speed</b>     | 10/100Mbps (10Mbps under CCTV Mode) |
| <b>Standard</b>  | PoE (IEEE802.3AF/AT)                |

# NVR12-16400PFAN(1U)

|                                    |                                       |
|------------------------------------|---------------------------------------|
| <b>CCTV Mode</b>                   | Yes (Up to 200m and 10Mbps bandwidth) |
| <b>Total Power</b>                 | 150W (Average 9.3W per Channel)       |
| <b>Max. Power Output (Per Ch.)</b> | ~25.5W                                |
| <b>Others</b>                      |                                       |
| <b>Power Supply</b>                | DC 48V/3.75A                          |
| <b>Power consumption (No HDD)</b>  | 20W                                   |
| <b>Dimension</b>                   | 380 × 268 × 48.1 mm                   |
| <b>Operation Temperature</b>       | 0°C~50°C                              |